

PRODUCT DATA

9 09 67 23 **Resinous
Flooring**

UCRETE® WR

Polyurethane concrete for forming
cove bases and renovating walls

Description

Ucrete® WR is a four-component polyurethane-concrete material. It is used with other Ucrete® products to form cove bases. Ucrete® WR applies by trowel and yields excellent results; it can be installed to a depth of 1/8" (3 mm) in a single lift or to greater thicknesses in multiple lifts. It is extremely tough and has many physical properties that exceed those of typical concrete.

Yield

For coverage rates refer to the Ucrete® Contractor Installation Guideline.

Packaging

Part 1: 1 qt (0.95 L) cans

Part 2: 1 qt (0.95 L) cans

Part 3: 24 lb (10.7 kg) bag

Part 4: 1 lb (0.4 kg) pigment packs

Colors

Red, gray, cream, green, black, blue and charcoal.

Because Ucrete® WR is a colored polyurethane concrete, color uniformity cannot be completely guaranteed from batch to batch. Do not mix batches within a single area.

Shelf Life

Part 1:

6 months when properly stored

Parts 2 and 3:

1 year when properly store

Part 4:

2 years when properly stored.

Features

- Fast curing
- Unaffected by freeze-thaw cycles
- Solvent free
- 30 years of project references
- Excellent impact and abrasion resistance
- Wide temperature service range from -50 to 235° F (-45 to 113° C)
- Can be applied to 7 – 10 day old concrete
- Chemical resistant
- Extremely high bond strength
- Coefficient of thermal expansion similar to concrete

Benefits

- Minimizes down time
- For interior or exterior use
- Low odor; VOC compliant
- Proven track record
- Handles heavy traffic
- Exceeds that of typical epoxy overlays
- Accelerates work schedules
- Tolerates organic and inorganic acids, alkalis, and salts
- Reduces shear at bond line
- Prevents shear at bondline

Storage

Store and transport in unopened containers in a clean, dry area at stable temperatures approximating 65° F (18° C).

Where to Use

APPLICATION

- To protect drains, tank bases, sumps, containment pits, curbs, and other vertical surfaces
- Where severe conditions exist—high impact pressure, thermal shock, and chemical exposure
- Use with all Ucrete® flooring products
- Chemical processing facilities
- Meat, poultry, and dairy plants
- Bakeries
- Confectionery-packaging areas

- Food warehouses
- Textile-production sites
- Precious-metal refineries
- Pharmaceutical facilities
- Freezers and refrigerated storage areas

LOCATION

- Interior and exterior applications

SUBSTRATE

- New and aged concrete; when applying over other surfaces, contact BASF Technical Service

Technical Data

Composition

Ucrete® WR is a four-component polyurethane-concrete cove-base material.

Compliances

- USDA accepted for use in federally inspected meat and poultry plants in the USA
- Ministry of Agriculture, Canada, accepted for use in food establishments in Canada
- British Standard Specifications (BSS), for use in the U.K.

Test Data


PROPERTY	RESULTS	TEST METHODS
Compressive strength , psi (MPa)	7,000 (48.3)	ASTM C 579
Tensile strength , psi (MPa)	1,000 (5.5)	ASTM C 307
Coefficient of thermal expansion , in/in/° F (cm/cm/° C)	1.1 x 10 ⁻⁵ (2.0 x 10 ⁻⁵)	ASTM C 531
Density , lb/ft ³ (g/cm ³)	130 (2.08)	ASTM C 905
Resistance to fungi growth	Passes, rating of 1	ASTM G 21
Impact resistance	No visible damage or deterioration at min.160 in-lb	ASTM D 2794
Compressive modulus , psi (MPa)	1.7 x 10 ⁵ (1,170)	ASTM C 469
Flexural strength , psi (MPa)	2,200 (15.2)	ASTM C 580
Modulus of elasticity , psi (MPa)	1.7 x 10 ⁵ (1,170)	ASTM C 469
Thermal conductivity , BTU-in/in-ft ² °F (W/mK)	8 (1.2)	ASTM C 177
Water absorption , %	< 0.1	ASTM C 413
Abrasion resistance , g loss; CS-17 Wheel, 1,000 cycles	0.07	ASTM D 4060
Resistance to elevated temperatures	No flow or softening	MIL-D-3134
Adhesion , psi (MPa)	400 (2.8) Cohesive / adhesive failure	ASTM D 4541

Chemical Resistance

In accordance with ASTM D 1308, Ucrete® WR will resist exposure for up to 48 days at 72° F (22° C) for the following chemicals.

- Dilute mineral acids, including hydrochloric (< 35%), phosphoric (< 50%), and sulfuric (< 30%)
- Alkalies, including potassium hydroxide to a 50% concentration
- Some dilute organic acids such as acetic (30%), formic, citric, and uric
- Fats, oils, and sugars
- Mineral oils, diesel fuel, kerosene, and gasoline
- Most organic solvents, including aliphatic and aromatic hydrocarbons and alcohol

NOTE: Full chemical resistance is achieved after curing for 7 days. For chemical resistance to a specific compound, consult the Ucrete® Chemical Resistance Guide for this flooring system. Contact your BASF representative for more information.

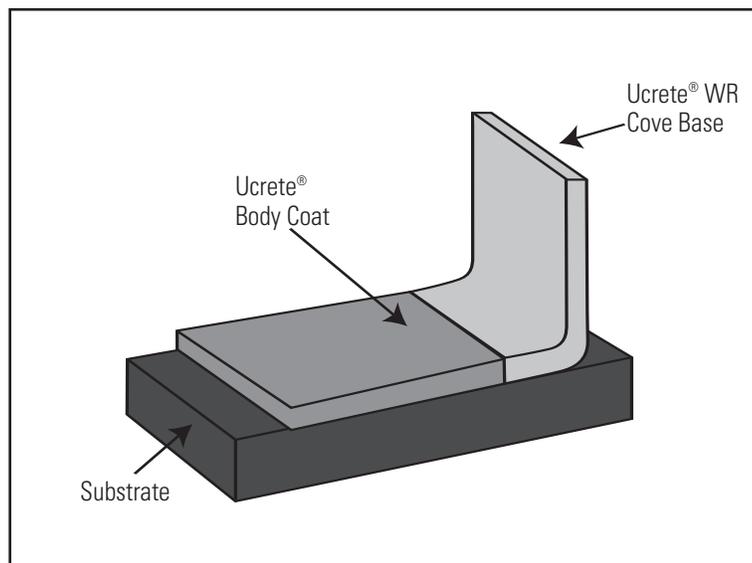

How to Apply

Ucrete® systems are installed by approved contracting firms who have completed the manufacturer's training workshops. Ucrete® is a globally branded product line with industry synergies around the world.

The following is only a summary of the installation techniques used by your Ucrete® approved contractors. Refer to the Ucrete® Contractor Installation Guideline for more information.

Surface Preparation

The success or failure of any application depends on proper preparation of the substrate. Ucrete® recommends a clean, sound substrate free of all surface contaminants. For WR at 1/8", profile to ICRI CSP 3 – 4. For WR at 3/16", profile to ICRI CSP 4–5. For WR at 5/16", profile to CSP 5 – 6.

Application

1. Prime the surface with the appropriate primer. See the Ucrete® Contractor Installation Guideline for details.
2. Mix the 4 components of Ucrete® WR using a mechanical mixer. The materials are supplied in pre-measured containers.
3. Trowel Ucrete® WR at a depth of 1/8" (3 mm) per lift. Use multiple lifts for thicknesses greater than 1/8" (3 mm). See the Ucrete® Contractor Installation Guide for additional information.

Maintenance

Regular cleaning and maintenance will prolong the life of all polymer flooring systems, enhance their appearance, and reduce any tendency to retain dirt. Ucrete® WR will withstand steam-cleaning, high-pressure hot-water washdowns (2,500 psi [17.2 MPa] at 180° F [82° C]) along with a wide range of decontamination and degreasing materials.

For Best Performance

- Substrates must be structurally sound, clean, dry, and free of any foreign matter that could inhibit adhesion.
- Do not apply at temperatures below 40° F (4° C) or above 85° F (29° C) or if the relative humidity is above 85%.
- Do not expose the Ucrete® WR to any chemicals until fully cured (12 – 24 hours at 70° F [21° C]). When temperatures fall below 50° F (10° C), curing time could exceed 48 hours to reach full operational strength.
- Do not apply Ucrete® WR to unreinforced drywall, asphalt or bitumen substrates, glazed tile, nonporous brick or tile, magnesite, copper, aluminum, existing coatings, epoxies, or polyesters.
- The architect and owner should address cove design with the flooring contractor before the job starts.
- BASF representatives and flooring specialists are available to assist you in the selection of the proper flooring system. Call 1-800-243-6739 for in-house and field technical assistance.
- Make certain the most current versions of product data sheet and MSDS are being used; call Customer Service (1-800-433-9517) to verify the most current versions.
- Proper application is the responsibility of the user. Field visits by BASF personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.

Health, Safety and Environmental

Read, understand and follow Material Safety Data Sheets and product labels for all components of this flooring system prior to use. The MSDS can be obtained by searching for them on www.BuildingSystems.BASF.com, e-mailing your request to basfbscst@basf.com or calling 800/433-9517. Use only as directed.

